


Partner with the Industry's Most
Experienced Equipment Team In Erosion and
Sediment Control



XA3300, XA4000, XA5000 Applicator

- Stainless steel mixing tank
- Corrosion reducing materials on tank top, working platform and ladder
- Fully enclosed engine compartment
- Innovatively designed hydraulic cooling package; decreases maintenance costs
- Industry exclusive **5 point** agitator seal assembly
- First of its kind, "**Power Pack**", design that is removable, replaceable and upgradable
- Twin, variable speed hydraulic agitators
- 170Hp **Cummins** engine
- Tier 3 & Tier 4 available
- 6" x 3" vortex pump with single bend suction line
- Raised loading hatch
- Industry leading warranty

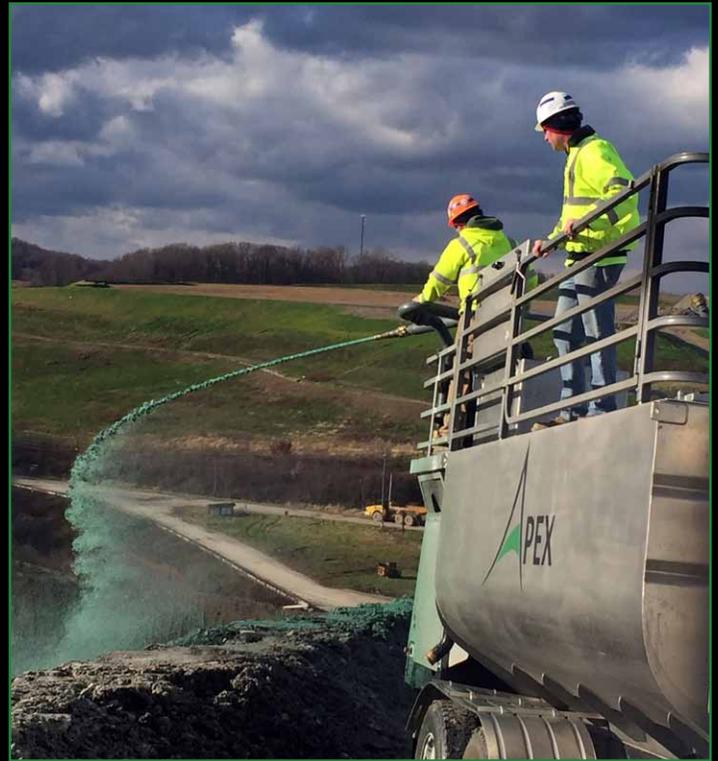


3460 Grant Dr. Lebanon, Ohio 45036
513.686.1330 · apexseeder.com

Environmental
Equipment - Materials - Technology



Extreme Applicator Specifications

Engine	Cummins QSB 4.5 (170hp) turbo charged, water cooled diesel. Tier 3 compliant engine with self diagnostics including engine shut off due to low oil pressure or high engine temperature	
Pump	6" x 3" centrifugal pump - single bend 6" suction line	
Agitation	Twin, variable speed (0-150 rpm) hydraulically driven agitators	
Standard Features	<ul style="list-style-type: none"> 3-16" stainless steel Military grade aluminum tank top Military grade aluminum rails Raised loading hatch - 20" (51cm) Fully integrated 80 gallon fuel tank 	<ul style="list-style-type: none"> Exclusive 5 point agitator seal assembly Lockable and fully enclosed engine compartment Three large swing gates Liquid recirculation
Nozzles	Complete set of 6 nozzles - two sets of long distance, narrow and wide ribbon fan	
Optional Equipment	Hydraulically operated hose reel with 200' of 1-1/4" hose Dual 3" discharge booms	
Discharge Distance	Up to 325' (99 meters)	

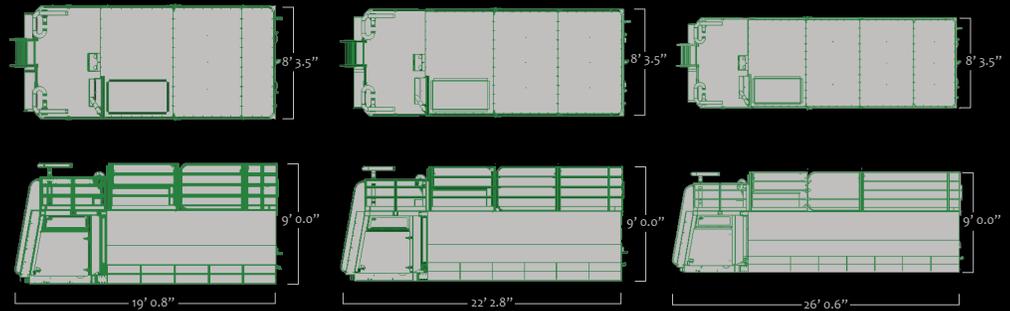

	XA3000	XA4000	XA5000
Tank: Liquid Capacity	3,260 gal / 12,370 l	3,950 gal / 14,952 l	4,740 gal / 17,943 l
Working Capacity	2,930 gal / 11,091 l	3,560 gal / 13,476 l	4,270 gal / 16,164 l
Materials Capacity			
Granular Solids	12,000 lb / 5,443 kg	14,800 lb / 6,713 kg	18,600 lb / 8,437 kg
Fiber Mulch	1,800 lb / 816 kg	2,150 lb / 975 kg	2,700 lb / 1,225 kg
Empty Weight	11,060 lb / 5,016 kg	12,000 lb / 5,443 kg	13,480 lb / 6,114 kg
Approx. Working Weight	37,140 lb / 16,846 kg	43,600 lb / 19,777 kg	51,400 lb / 23,315 kg

*Weights are approximate and do not include any stowed materials.

3460 Grant Dr. Lebanon, Ohio 45036
513.686.1330 · apexseeder.com

Environmental
Equipment - Materials - Technology